

# INSTANT CONNECT WATER HEATER

## Engineered to ensure consistent water pressure

- Direct connection for consistent pressure maintenance
- Multi-outlet capability to support multiple bathrooms
- ¾ inch for each outlet and 1 inch for the inlet
- 2000-watt heating element power
- Available in corrosion-resistant copper or porcelain-coated tanks
- Available in two capacities: 16-gallon in horizontal or vertical, and 12-gallon in vertical
- For systems with a pressure pump, an 8-bar heater is recommended; without it, a 4-bar heater is suitable
- Equipped with a cleaning port
- Available in both horizontal and vertical designs based on the clients requirements

### Triple Safety Features

1. Thermostat for temperature control
2. Automatic cutoff if the temperature exceeds 90°C
3. Pressure relief in case of overpressure

### Warranty


- 5 years for porcelain-coated heaters
- 10 years for copper heaters
- Warranty does not cover heating elements
- Proper pressure maintenance is required

**Made in Kuwait with with factory warranty**

Type	16 Gallon			12 Gallon	
corrosion-resistant copper	Pressure	Horizontal	Vertical	Pressure	Vertical
	4-bar	KD 100		4-bar	KD 90
	8-bar	KD 120		8-bar	KD 100
porcelain-coated	Pressure	Horizontal	Vertical	Pressure	Vertical
	8-bar	KD 54		8-bar	KD 50




**DIRECT SALE**  **99 00 11 46**

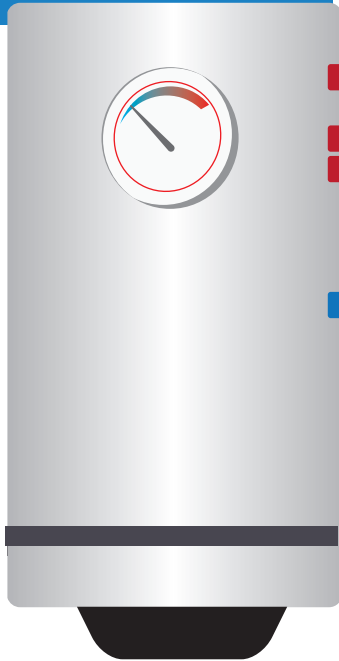



Option 1

Ventilation to the roof  
Outlet for another bathroom

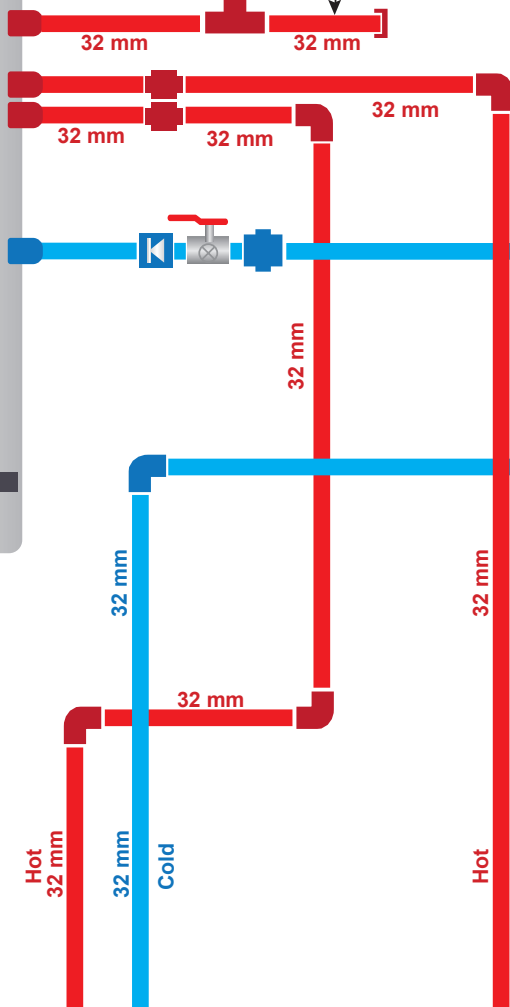


Option 2

Air vent valve  
Outlet for another bathroom  
Pressure relief valve without a check valve core

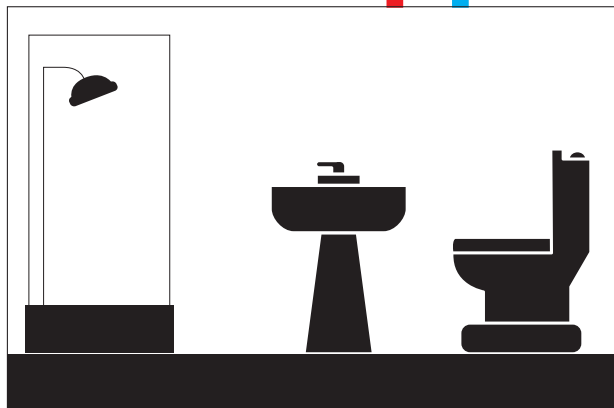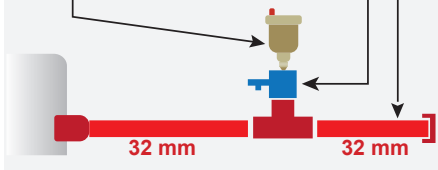

Bathroom 2

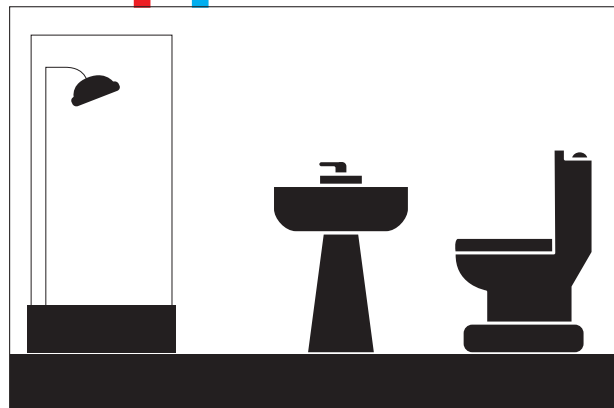

Bathroom 1

